

**UTILIZATION OF CONDUCTING POLYMERS AS
SENSITIZERS IN SOLID-STATE PHOTOCELLS**

A PROJECT REPORT PRESENTED BY

THUSITHA PATHIRATHNE

to the Board of Study in Chemical Sciences of the
POSTGRADUATE INSTITUTE OF SCIENCE

*in partial fulfillment of the requirement
for the award of the degree of*


MASTER OF SCIENCE IN ANALYTICAL CHEMISTRY

of the

UNIVERSITY OF PERADENIYA

SRI LANKA

2006

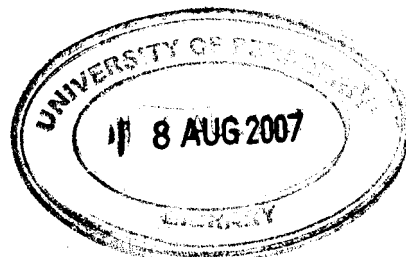

603712

UTILIZATION OF CONDUCTING POLYMERS AS SENSITIZERS IN SOLID-STATE PHOTOCELLS

W. M. T. C. Pathirathne

Postgraduate Institute of Science

University of Peradeniya

Peradeniya

Sri Lanka

Substituted thiophene sensitized, nanocrystalline TiO₂-based quasi solid-state solar cells were fabricated by using either poly (3-thiophene acetic acid) (P3TAA) or a copolymer with poly (3-thiophene acetic acid)-poly(hexylthiophene) (P3TAA-PHT) and their performances were examined. The photocells were able to generate reasonably high photocurrents in the presence of hole transporting material CuI for the first time in polymer sensitized solid-state photovoltaic devices. Dramatic enhancement in the cell performances were observed with the addition of an ionic liquid 1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl) amide (EMImTf₂N) and LiTf₂N to the CuI solution as additives for charge transport promotion. The cell sensitized with P3TAA generated a short circuit photocurrent of ~1.4 mAcm⁻² with an open-circuit voltage of ~330 mV and a total power conversion efficiency of ~0.25% under the irradiance of 1000 Wm⁻² (1.5 Air Mass). In the case of copolymer P3TAA-PHT delivered ~0.28% efficiency under the same conditions with ~1.45 mAcm⁻² as photocurrent and ~325 mV as photovoltage. The corresponding incident photon to current conversion efficiencies (IPCE) of the above cells were ~37 % and ~31 %, respectively.